

Deshydrateur Flexisorb


# RECUSORB / CONSORB



Débit d'air sec  
900 - 61100 m<sup>3</sup>/h


- ↳ Conception flexible
- ↳ Adapté à la demande
- ↳ Roue lavable
- ↳ Faibles coûts énergétiques
- ↳ Contrôle optimisés
- ↳ Cassette amovible

**Flexisorb:** une machine, plusieurs solutions.  
Le système Flexisorb permet une adaptation optimale de vos besoins en fonction de vos spécifications.

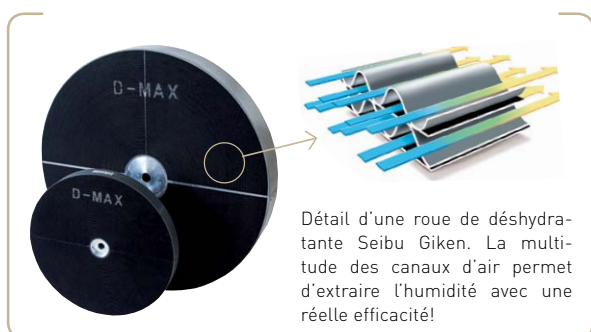

Détail d'une roue de déshydratante Seibu Giken. La multitude des canaux d'air permet d'extraire l'humidité avec une réelle efficacité!



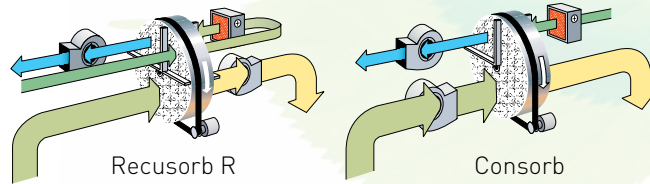

| Recusorb - with internal heat recovery for good energy efficiency |                     |                     |                 |                 |                           |                |
|---|---------------------|---------------------|-----------------|-----------------|---------------------------|----------------|
| Unit  | Min process airflow | Max process airflow | Max wet airflow | Heater power    | 2 g/kg from 10°C/100%RH * | Heater power * |
| RF-081  | 900 m3/h            | 4 500 m3/h          | 900 m3/h        | 8+8+8=24kW      | 2 500 m3/h                | 22 kW          |
| RF-101  | 1 500 m3/h          | 7 000 m3/h          | 1 900 m3/h      | 24+12+6=42kW    | 3 600 m3/h                | 31 kW          |
| RF-102  | 3 000 m3/h          | 9 700 m3/h          | 2 900 m3/h      | 40+20+10=70kW   | 6 500 m3/h                | 54 kW          |
| RF-122  | 4 800 m3/h          | 15 600 m3/h         | 5 400 m3/h      | 64+32+16=112kW  | 10 600 m3/h               | 88 kW          |
| RF-152  | 7 600 m3/h          | 24 800 m3/h         | 7 300 m3/h      | 100+50+25=175kW | 16 800 m3/h               | 140 kW         |
| RF-172  | 9 700 m3/h          | 31 500 m3/h         | 9 300 m3/h      | 226kW           | 21 300 m3/h               | 177 kW         |
| RF-192  | 12 000 m3/h         | 39 900 m3/h         | 11 800 m3/h     | 288kW           | 27 100 m3/h               | 225 kW         |
| RF-222  | 16 000 m3/h         | 51 300 m3/h         | 15 100 m3/h     | 368kW           | 34 800 m3/h               | 289 kW         |
| RF-242  | 19 000 m3/h         | 61 100 m3/h         | 18 000 m3/h     | 438kW           | 41 500 m3/h               | 345 kW         |

\* Process air flow to have dry air at 33°C / 2g/kg with: - process air inlet 10°C / 100%RH  
 - wet air inlet at 30°C / 12 g/kg - wet air flow 36% of process air flow  
 - regeneration temperature 140°C - purge by-pass

| Consorb 75/25 - for large differences in moisture content between process and regeneration inlet |                     |                     |                 |                    |                           |                |
|--|---------------------|---------------------|-----------------|--------------------|---------------------------|----------------|
| Unit   | Min process airflow | Max process airflow | Max wet airflow | Heater power       | 2 g/kg from 10°C/100%RH * | Heater power * |
| CF-081 75/25   | 1 000 m3/h          | 4 500 m3/h          | 900 m3/h        | 8+8+8=24kW         | 2 400 m3/h                | 24 kW          |
| CF-101 75/25   | 2 000 m3/h          | 7 000 m3/h          | 1 900 m3/h      | 24+12+12=48kW      | 3 900 m3/h                | 39 kW          |
| CF-102 75/25   | 3 700 m3/h          | 9 700 m3/h          | 2 900 m3/h      | 40+20+10+10=80kW   | 7 800 m3/h                | 75 kW          |
| CF-122 75/25   | 6 000 m3/h          | 15 600 m3/h         | 5 400 m3/h      | 64+32+16+16=128kW  | 12 700 m3/h               | 123 kW         |
| CF-152 75/25   | 9 500 m3/h          | 24 800 m3/h         | 7 300 m3/h      | 100+50+25+25=200kW | 20 000 m3/h               | 193 kW         |
| CF-172 75/25   | 12 000 m3/h         | 31 500 m3/h         | 9 300 m3/h      | 260kW              | 25 000 m3/h               | 241 kW         |
| CF-192 75/25   | 15 000 m3/h         | 39 900 m3/h         | 11 800 m3/h     | 330kW              | 32 000 m3/h               | 308 kW         |
| CF-222 75/25   | 19 000 m3/h         | 51 300 m3/h         | 15 100 m3/h     | 420kW              | 42 000 m3/h               | 404 kW         |
| CF-242 75/25   | 23 000 m3/h         | 61 100 m3/h         | 18 000 m3/h     | 500kW              | 50 000 m3/h               | 481 kW         |

\* Process air flow to have dry air at 36°C / 2g/kg with: - process air inlet 10°C / 100%RH  
 - wet air flow at 33°C / 23 g/kg - wet air flow 26% of process air flow  
 - regeneration temperature 140°C

| Consorb 60/40 - when low-cost energy at low temperatures is available |                    |                     |                      |   |
|---|--------------------|---------------------|----------------------|---|
| Unit  | Regen. temp 45°C * | Regen. temp 70°C ** | Regen. temp 90°C *** |   |
| CF-081 60/40  | 1 800 m3/h         | 2 100 m3/h          | 2 000 m3/h           | * Process air flow to have dry air at 6 g/kg with regeneration temperature 45°C.<br>** Process air flow to have dry air at 4 g/kg with regeneration temperature 70°C.<br>*** Process air flow to have dry air at 3 g/kg with regeneration temperature 90°C. |
| CF-101 60/40  | 2 900 m3/h         | 3 300 m3/h          | 3 200 m3/h           |   |
| CF-102 60/40  | 5 700 m3/h         | 6 500 m3/h          | 6 300 m3/h           |   |
| CF-122 60/40  | 9 300 m3/h         | 10 600 m3/h         | 10 300 m3/h          | For all Consorb 60/40 data: Process air and regeneration air inlet at 20°C / 60%RH / 8,7g/kg. Wet air flow 2/3 of process airflow.  |
| CF-152 60/40  | 14 700 m3/h        | 16 800 m3/h         | 16 200 m3/h          |   |
| CF-172 60/40  | 18 700 m3/h        | 21 300 m3/h         | 20 700 m3/h          |   |
| CF-192 60/40  | 23 700 m3/h        | 27 000 m3/h         | 26 200 m3/h          |   |
| CF-222 60/40  | 30 400 m3/h        | 34 700 m3/h         | 33 600 m3/h          |   |
| CF-242 60/40  | 36 200 m3/h        | 41 300 m3/h         | 40 100 m3/h          |   |

| Recusorb dp - for low dewpoints, one pushing fan for both dry air and wet air |                   |                |                    |                 |                     |                  |
|---|-------------------|----------------|--------------------|-----------------|---------------------|------------------|
| Unit  | Dew point -30°C * | Heater power * | Dew point -50°C ** | Heater power ** | Dew point -65°C *** | Heater power *** |
| RF-081 dp   | 900 m3/h          | 11 kW          | 400 m3/h           | 5 kW            | 400 m3/h            | 6 kW             |
| RF-101 dp   | 1 400 m3/h        | 17 kW          | 700 m3/h           | 9 kW            | 700 m3/h            | 10 kW            |
| RF-102 dp   | 2 900 m3/h        | 36 kW          | 1 400 m3/h         | 15 kW           | 1 400 m3/h          | 20 kW            |
| RF-122 dp   | 4 700 m3/h        | 58 kW          | 2 300 m3/h         | 29 kW           | 2 300 m3/h          | 33 kW            |
| RF-152 dp   | 7 600 m3/h        | 94 kW          | 3 800 m3/h         | 47 kW           | 3 800 m3/h          | 54 kW            |
| RF-172 dp   | 9 600 m3/h        | 119 kW         | 4 800 m3/h         | 60 kW           | 4 800 m3/h          | 69 kW            |
| RF-192 dp   | 12 200 m3/h       | 151 kW         | 6 100 m3/h         | 76 kW           | 6 100 m3/h          | 87 kW            |
| RF-222 dp   | 15 700 m3/h       | 195 kW         | 7 800 m3/h         | 97 kW           | 7 800 m3/h          | 111 kW           |
| RF-242 dp   | 18 700 m3/h       | 232 kW         | 9 300 m3/h         | 115 kW          | 9 300 m3/h          | 133 kW           |

\* Dry airflow to have dry air at -30°C dp with air inlet at 8°C/100%RH. Regeneration temperature 140°C  
 \*\* Dry airflow to have dry air at -50°C dp with air inlet at 5°C/100%RH. Regeneration temperature 140°C  
 \*\*\* Dry airflow to have dry air at -65°Cdp with air inlet at 5°C/100%RH. Zeolite rotor. Regeneration temperature 180°C  
 For all Recusorb dp: Wet air flow 1/2 of process air flow.

Changement sans préavis.